




SUPERRAPID F390								
			m/min	kg	kW	m/min	kg	kW
Sollevamento Hoisting Heben Levage Elevación			8	2000	2,6	4	4000	2,6
			23	2000	8,8	11,5	4000	8,8
			46	1000	8,8	23	2000	8,8
Distribuzione • Trolleying • Katzfahren Distribution • Distribución (Inverter)				18/42	3	18/42	3	
Rotazione • Slewing • Schwenken Orientation • Orientación				0,2 ▶ 0,9 tr/min - U/min - rpm	4 daN m	0,2 ▶ 0,9 tr/min - U/min - rpm	4 daN m	
Montaggio • Erection • Montage • Montage • Montaje					2,2 kW			
Potenza elettrica necessaria • Necessary electric power • Anschlusswert • Puissance électrique nécessaire Potencia eléctrica necesaria					20 kVA			
Rete elettrica • Main supply • Netzstrom • Réseau • Alimentación					380/400 V - 50Hz			
Zavorra • Ballast • Ballast • Last • Lastre	19000 kg	Peso gru • Weight of crane • Konstruktionsgewicht Poids de la grue • Peso de la grua				10000 kg		

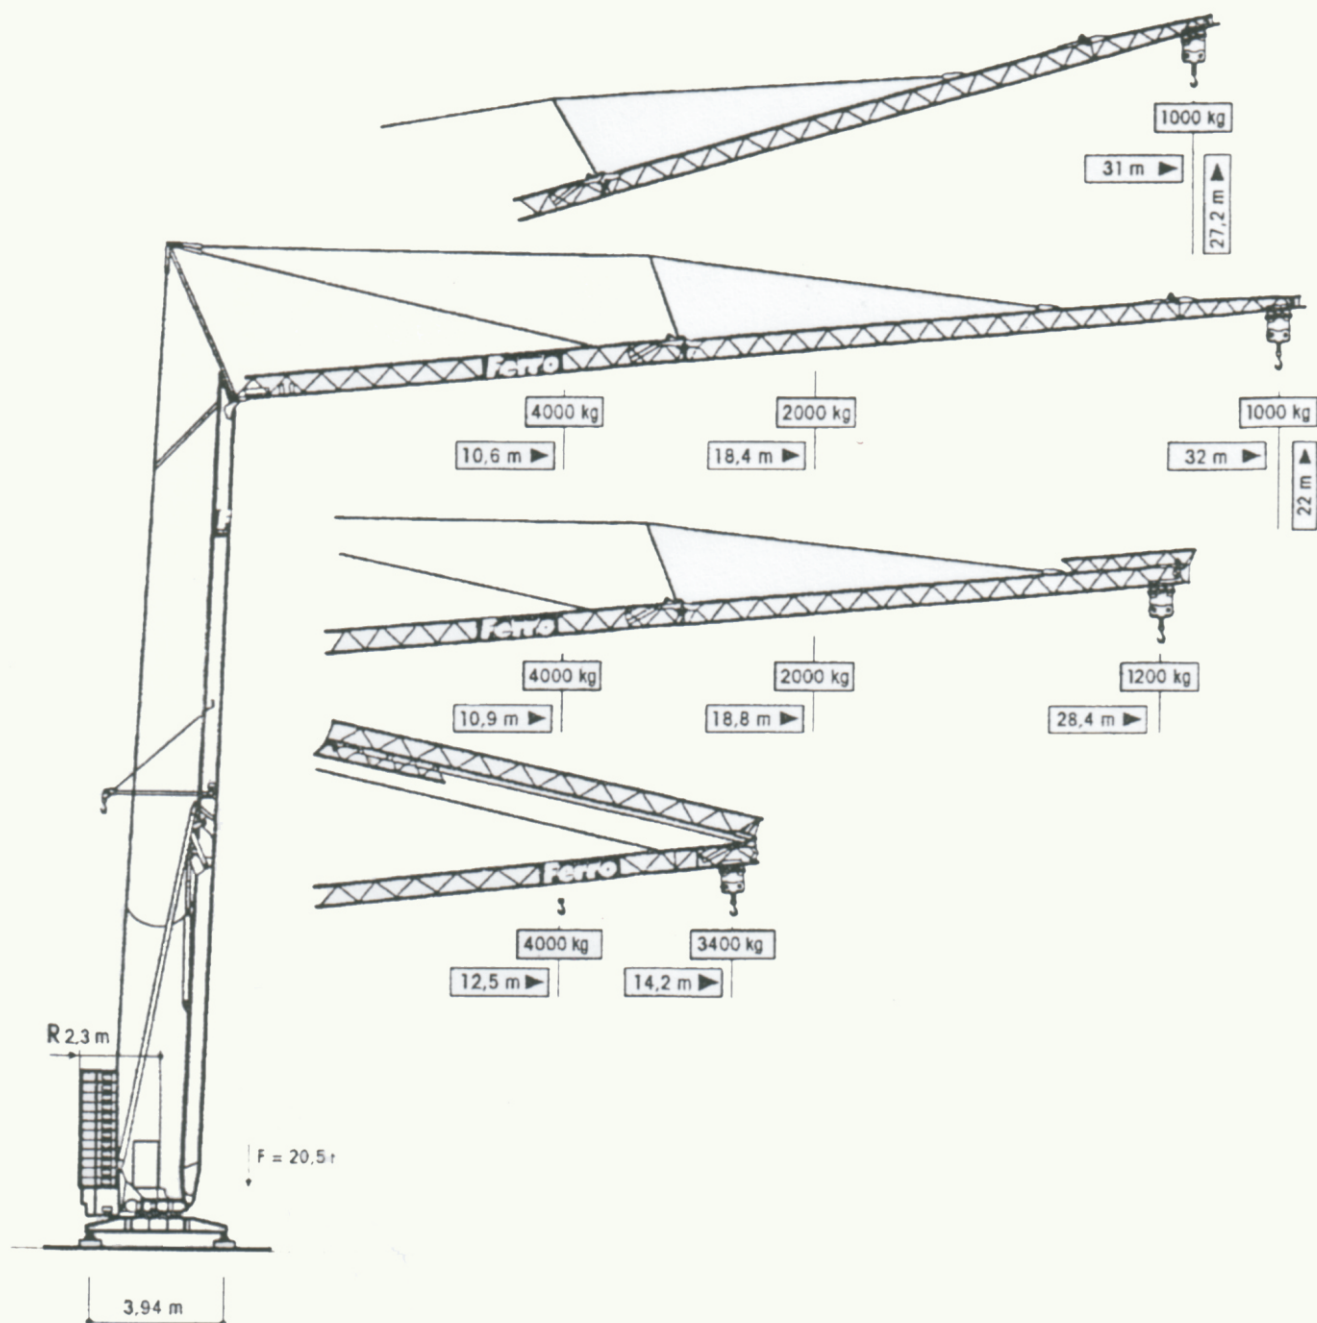